

Input data

System of measurement		Metric
Input type		Gear motor
Input speed	[rpm]	1400
Output speed	[rpm]	2.38
Ratio (i=)		588
Frequency	[Hz]	50
Input options		IEC
Requested input power	[kW]	1.1
Service factor		1
Rated Power P1	[kW]	1.07

Output data

Gear unit	M RA 100/150 PC 10 588 90 B14 AC 55 MT 1.1 kW 90 S4 B14 X3 B3
------------------	--

Type		RA - Worm speed reducers
Input type		M
Size		100/150
Ratio (i=)		588
Gearbox ratio		70.00
Pre-stage ratio		8.40
Input flange		B14
Mounting position		B3
Input speed	[rpm]	1400
Output speed	[rpm]	2.38
Rated output torque	[Nm]	2161.93
Service Factor		1
Efficiency		0.49

Gear unit configuration

Output shaft		Hollow output shaft
Fixing		Shaft mounting
Version		PC
Attachment position		10

Output radial and axial loads

Ball bearings output radial load	[N]	16500
Taper bearings output radial load	[N]	19500
Ball bearings output axial load	[N]	3300
Taper bearings output axial load	[N]	3900

Accessories





Hollow output shaft		AC 55
---------------------	--	-------

Electric motor


Size		90 S4
Poles		4
Power	[kW]	1.1

Electric motor configuration

Motor flange		B14
Terminal box position		X3

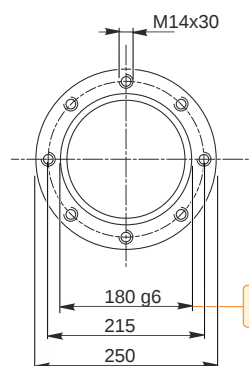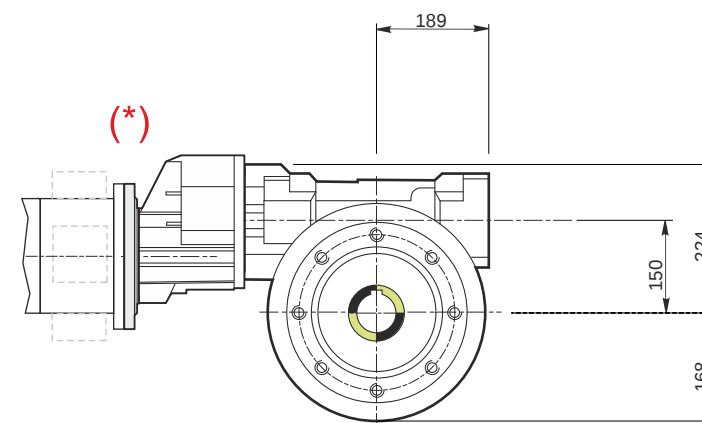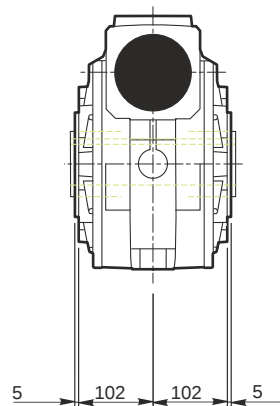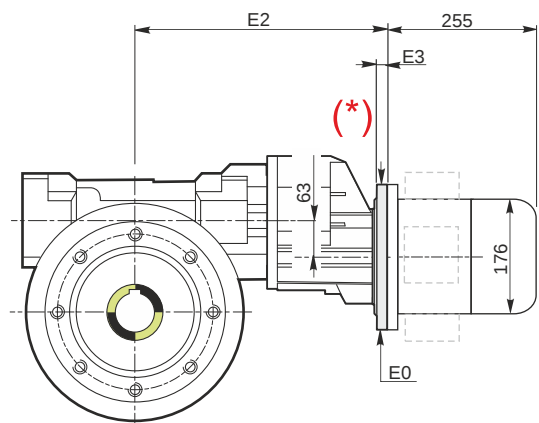


Hollow output shaft




179.986
179.961


55.030
55.000



Attachment position

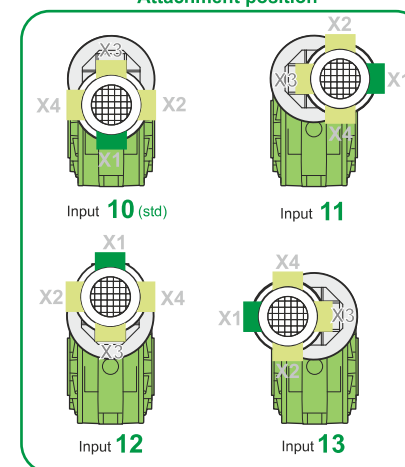

Mounting positions

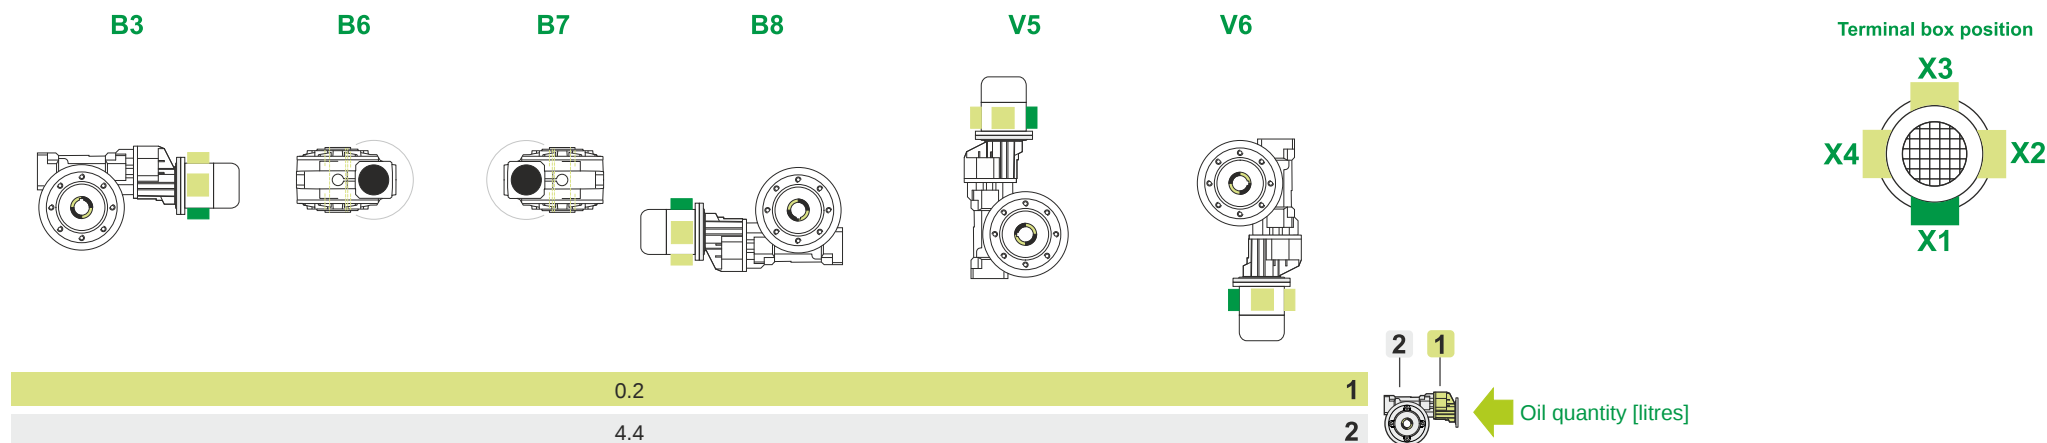

Lubricant type: Long life synthetic oil ISO VG320

Direction of rotation



Weight

Gear unit [kg]	94
Electric motor [kg]	12

Gearing data

Axial module	3.60
Number of starts	1
Lead angle	4° 17'
Pressure angle	20°

Backdriving

Static self-locking
Slow back-driving in case of vibrations
Low dynamic back-driving